

Streetlight – Lens 360°

Material

Part name:	Streetlight Lens
Part no.:	1500954
Design:	360°
Substrate:	SUPRAX® 8488 Borosilicate Glass
Height:	33 mm
Diameter:	60 mm



Customs tariff number

70140000

01v00

Customize it...

Our processing centers offer the following customization options:


- Individual masking
- Individual geometries & cuts
- Individual polishing & surface finishing

Please send us your drawing via the [contact form](#) or to Info@auer-lighting.com.

Characteristics

Weight:	approx 117 g
Heat resistance:	< 450°C
Transmission:	> 85 % (uncoated)
Efficiency:	90%
Optical Design:	Asymmetric rectangular light distribution

Drawing data

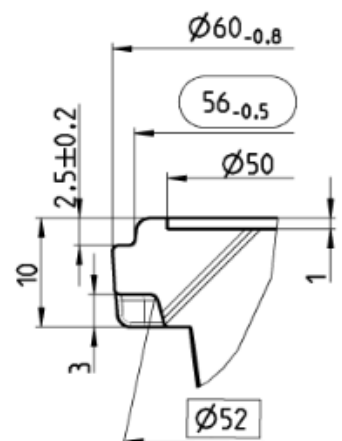

LED Source Compatibility

Works best with: CREE CXA1850

Others: Bridgelux Vero10-18; V6-18; CREE CXA13XX, CXA15XX, CXA18XX, CXA25XX, CXB1304, CXB15XX, CXB18XX, CXB25XX; OSRAM, Soleriq S13, S19, P6, P9; Philips Lumileds Luxeon 120X; Citizen COBs, Edison COBs, Luminus COBs, Nichia COBs

Applications

Creative and sophisticated lighting solutions
Suitable for LED
Architectural lighting

Auer Lighting GmbH
Hildesheimer Straße 35
37581 Bad Gandersheim
Germany

T +49 (0) 5382 701 · 0
F +49 (0) 5382 701 · 297

info@auer.lighting.com
www.auer-lighting.com